

## YSL100 CC SERIES

Input: 100-240VAC/200-240V 50-60Hz  
Output Current: depend on requirement  
Rated Power: 100W max

### Features


- Universal Input: 100-240V/200-240V AC 50-60Hz
- RoHS Compliance
- EMI Standard EN55015
- Safety Standard: EN61347-1, EN61347-2-13, UL8750
- Inrush current < 65A AC230V/50Hz
- High efficiency & low power consumption
- Short Circuit, Over Current and Over Voltage Protection
- Over temperature protection
- 100% full load burn-in test

### Application

LED lights lighting  
LED indoor lighting  
LED decorative lighting  
LED building lighting



## ■ Dimensions and Installation

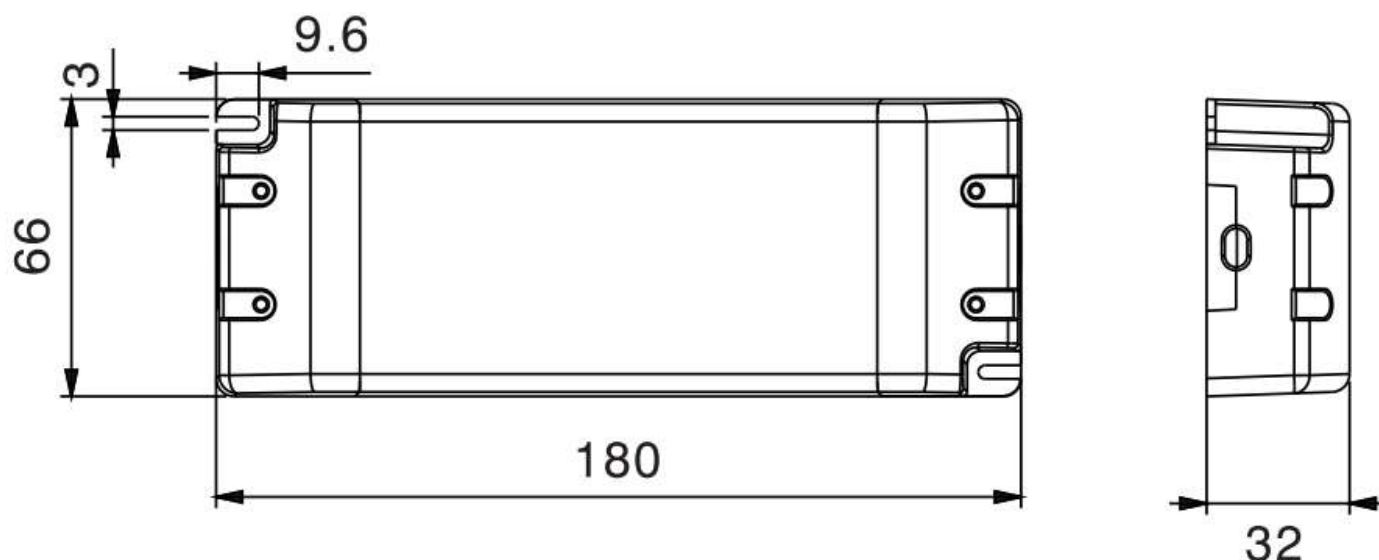


## YSL100 CC SERIES

MODEL DETAIL SPEC. (allow for customized)		YSL100-1400	YSL100-2100	YSL100-2400	YSL100-3600
INPUT	Input Voltage:	100-240VAC/ 200-240VAC			
	Input Frequency:	50-60Hz			
	Inrush Current:	65 Amps max. at 230VAC/50Hz,full load			
	AC Current:	0.56A/230VAC			
	Leakage Current:	< 0.35mA/240VAC			
	Efficiency:	89%	89%	89%	89%
OUTPUT	Rated Current:	1400mA	2100mA	2400mA	3600mA
	Voltage Range:	43-71.4V	30-47.6V	25-41.6V	20-27.8V
	Rated Power:	100W	100W	100W	100W
	Current Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	<5%	<5%	<5%	<5%
	Line Regulation:	±3%			
	Load Regulation:	±5%			
	Setup, Rise, Hold Up time:	1s, 10ms/60ms 230VAC 1000ms, 1ms/25ms 115VAC at full load			
ENVIRONMENTAL	Operating Temperature:	-20 ~ +50 (Refer to "Derating Curve")			
	Storage Temp:	-40℃ ~ 85℃			
	Storage Humidity:	20 ~ 95% RH			
	Working Humidity:	20 ~ 95% RH non-condensing			
PROTECTION	Over Load:	Above 105%-130% rated output power			
		Protection type: Hiccup mode, recovers automatically after fault condition is removed			
	Over Voltage:	Above 105%-130% rated output power			
		Protection type: Shut down o/p voltage, re-power on to recover			
	Over Temperature:	Shut down o/p voltage, re-power on to recover			
SAFETY & EMC	Safety Regulations:	EN61347-2-13:2014+A1:2017,EN61347-1:2015;EN62493:2015			
	Withstand Voltage:	I/P-O/P:3750KVAC			
	Harmonic	EN61000-3-2 Class C EN61000-3-3			
	EMI:	Compliance to EN55015			
	EMS:	compliance to 61547:2009			
OTHER	MTBF:	200,000 Hours Minimum at Full Load at 25℃ Ambient			
	Size:	180*66*32mm			
	Weight:	320g / pcs			
	Packaging:	100PCS/CTN,37.5*28.5*24cm			


## YSL100 CC SERIES

Deduction curve  
and temperature

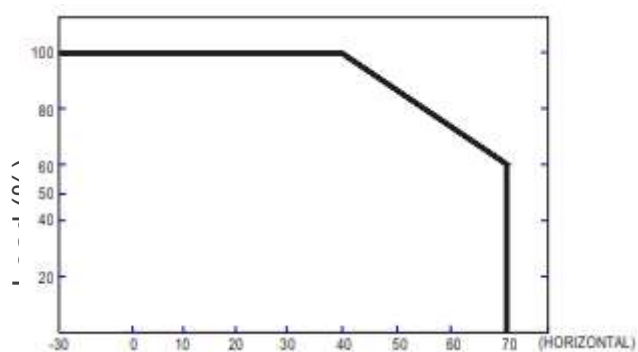

Environment temperature(°C)

Minus output  
and input voltage curves

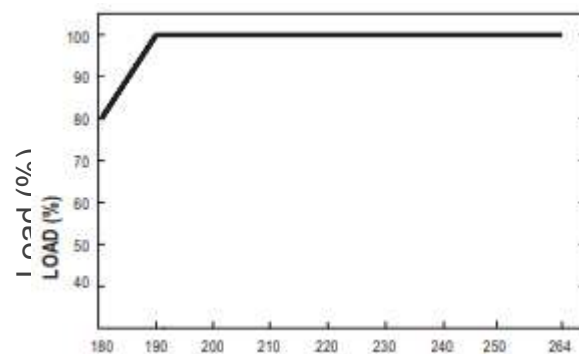

Input voltage(VAC)

## Functional Diagram

